

# SIMPLE COMMERCIAL

(door height up to 2,5 m)



Infrared Remote Control

Remote Control

left or right motor side



motor position:  
LEFT  
RIGHT

0,7m

0,8m

1,0m

motor position:  
MIDDLE

1,2m

1,4m

1,6m

1,8m

2,0m

MAXIMUM DOOR WIDTH

- Energy Saving
- Barrier to Insects, Dust Odours, Pollutants & Humidity
- Slim Line Design
- Easy Installation
- Low Noise Level
- Motor position: Center, Left, Right


## OPERATION WAYS

- ON-OFF / HI-LOW (switches) (STANDARD)
- ON-OFF / HI-LOW with wired remote control (C.B)
- ON-OFF / HI-LOW with infrared remote control (I.R)
- ON-OFF / HI-LOW with wired + infrared remote control (R.C)
- New logic control system (NL)
- New eco control system (ECO)

## FOR USE IN:

SMALL SHOPS, JEWELRIES, HAIRDRESSER SALONS, HEALTH SPAS, BARS, CAFETERIAS, PASTRY SHOP, BREWERIES, SMALL HOTELS, BANKS, SCHOOLS, SUPER MARKETS, FOOD FACTORIES, MEAT FACTORIES, FISH MONGER SHOPS, SMALL COLD STORAGE PLANTS

cross flow fan  $\phi$  100 diameter

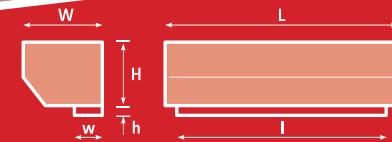



### OPTIONAL

- Filter
- Vertical mount
- Door switch
- Inox body (430 stainless steel)
- Inox louver (430 stainless steel)



### TECHNICAL DETAILS

TYPE	L or R-11w	L or R-12w	L or R-13w	K-14w	K-15w	K-16w	K-17w	K-18w
Max door width (m)	0.7	0.8	1.0	1.2	1.4	1.6	1.8	2.0
Max door height (m)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Max Outlet velocity (m/sec)	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0	10.0 / 8.0
Max Air volume (m <sup>3</sup> /h)	1000 / 800	1150 / 900	1300 / 1050	1400 / 1100	1700 / 1350	2000 / 1600	2200 / 1800	2500 / 2000
Motor power input (W)	120	120	120	240	240	240	240	240
Capacitor (µF)	4	4	4	4	4	4	4	4
Noise level in 1 m [dB(A)]	54 / 45	54 / 45	54 / 45	60 / 53	60 / 53	60 / 53	61 / 55	61 / 55
<b>L:</b> Total length (mm)	847	945	1045	1206	1406	1606	1806	2006
<b>W:</b> Total width (mm)	166	166	166	166	166	166	166	166
<b>H:</b> Height (mm)	172	172	172	172	172	172	172	172
<b>l:</b> Outlet length (mm)	700	800	900	1160	1360	1560	1760	1960
<b>w:</b> Outlet width (mm)	54	54	54	54	54	54	54	54
<b>h:</b> Outlet height (mm)	64	64	64	64	64	64	64	64
Weight (kg)	8	9.5	11	15	17	19	22	24
Power supply (V/Hz/N-)	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Motor speed (rpm)	1300 / 900	1300 / 900	1300 / 900	1300 / 900	1300 / 900	1300 / 900	1300 / 900	1300 / 900
Ingress Protection	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20

\*Company OLEFINI reserves the right to alter given product specifications without further notice.