

# SIMPLE INDUSTRIAL

(door height up to 6,0 m)



motor position:  
LEFT  
RIGHT

1,0m

1,2m

motor position:  
MIDDLE

1,2m

1,6m

2,0m

MAXIMUM DOOR WIDTH

- Energy Saving
- Barrier to Insects, Dust Odours, Pollutants & Humidity
- Controlled Microclimate
- Slim Line Design
- Easy Installation
- Conventional or Infrared Remote Control

air curtains with motor side left or right



Infrared Remote Control



Remote Control




## OPERATION WAYS

- ON-OFF / HI-LOW with wired remote control (C.B)
- ON-OFF / HI-LOW with infrared remote control (I.R)
- ON-OFF / HI-LOW with wired + infrared remote control (R.C)
- New eco control system (ECO) (consult supplier for availability)
- New logic control system (NL)

## FOR USE IN:

LARGE INDUSTRIAL SPACES, DOORS & PASS THROUGH OPENINGS, AIRPORTS, BUSS STATIONS, STORAGE AREAS, LARGE COLD STORAGE PLANTS, GARAGES, STADIUMS




cross flow fan  
Ø 133 diameter



### OPTIONAL

- Filter
- Vertical mount
- Door switch
- Inox body  
(430 stainless steel)
- Inox louver  
(430 stainless steel)

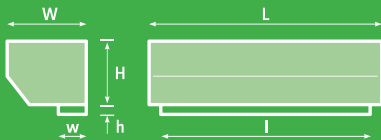

### TECHNICAL DETAILS

TYPE	L or R-22	L or R-23	K24	K-26	K-28
Max door width (m)	1.0	1.2	1.2	1.6	2.0
Max door height (m)	6.0	6.0	6.0	6.0	6.0
Max Outlet velocity (m/sec)	14.0 / 12.0	14.0 / 12.0	14.0 / 12.0	14.0 / 12.0	14.0 / 12.0
Max Air volume (m <sup>3</sup> /h)	3050 / 2615	3715 / 3185	3035 / 2600	4245 / 3640	5580 / 5280
Motor power input (W)	660	660	660	660	660
Capacitor (µF)	12	12	12	12	15
Noise level in 1 m [dB(A)]	68 / 65	68 / 65	68 / 65	68 / 65	68 / 65
<b>L:</b> Total length (mm)	1270	1491	1259	1663	2097
<b>W:</b> Total width (mm)	231	231	231	231	231
<b>H:</b> Height (mm)	227	227	227	227	227
<b>l:</b> Outlet length (mm)	1015	1236	1200	1603	2044
<b>w:</b> Outlet width (mm)	76	76	76	76	76
<b>h:</b> Outlet height (mm)	64	64	64	64	64
Weight (kg)	24	27	27	31	36
Power supply (V/Hz/N-)	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Motor speed (rpm)	1370 / 1100	1370 / 1100	1370 / 1100	1370 / 1100	1370 / 1100
Ingress Protection	IP20	IP20	IP20	IP20	IP20

\*Company OLEFINI reserves the right to alter given product specifications without further notice.