

SIMPLE RECESSED

(door height up to 4,0 m)

1,2m

1,4m

1,6m

1,8m

2,0m

MAXIMUM DOOR WIDTH



key for lock

OPERATION WAYS

- ON-OFF / HI-LOW with wired remote control (C.B)
- ON-OFF / HI-LOW with infrared remote control (I.R)
- New logic control system (NL)
- New eco control system (ECO)
(consult supplier for availability)

OPTIONAL

- Door switch



adjustable air flaps

FOR USE IN:


DEPARTMENTS STORES, LARGE HOTELS,
LARGE FAST FOODS, LARGE SUPER MARKETS,
COLD STORAGE PLANTS, AIRPORTS, BUSS STATIONS
& in general LARGE, CROWED & FREQUENTLY VISITED PLACES



cross flow fan
Ø 120 diameter



Infrared
Remote
Control

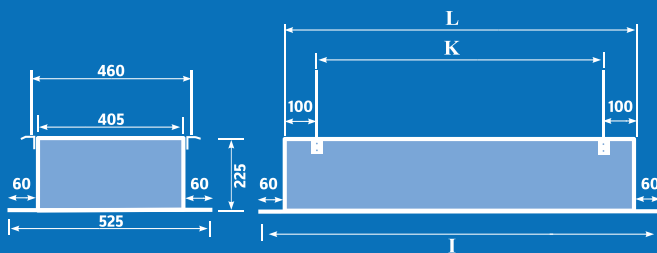

TECHNICAL DETAILS

| TYPE | RS-34 | RS-35 | RS-36 | RS-37 | RS-38 | RS-40 |
|------------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Max door width (m) | 1,2 | 1,4 | 1,6 | 1,8 | 2,0 | 2,4 |
| Max door height (m) | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 | 4,0 |
| Max Outlet velocity (m/sec) | 11 / 9 | 11 / 9 | 11 / 9 | 11 / 9 | 11 / 9 | 11 / 9 |
| Max Air volume (m ³ /h) | 2600 / 2130 | 3110 / 2545 | 3620 / 2960 | 4130 / 3380 | 4632 / 3790 | 5400 / 4420 |
| Motor power input (W) | 350 | 660 | 660 | 660 | 660 | 660 |
| Capacitor (µF) | 8 | 12 | 12 | 12 | 12 | 12 |
| Noise level in 1 m [dB(A)] | 66 / 64 | 66 / 64 | 66 / 64 | 67 / 64 | 67 / 64 | 67 / 64 |
| DIMENSIONS | | | | | | |
| L: Unit length (mm) | 1255 | 1455 | 1655 | 1855 | 2055 | 2454 |
| K: Mounting distance (mm) | 1055 | 1255 | 1455 | 1655 | 1855 | 2256 |
| I: Total Unit length (mm) | 1378 | 1578 | 1778 | 1978 | 2178 | 2578 |
| Weight (kgr) | 32,5 | 38 | 43 | 47 | 52 | 57 |
| Power supply (V/Hz/N-) | 230 / 50 / 1 | 230 / 50 / 1 | 230 / 50 / 1 | 230 / 50 / 1 | 230 / 50 / 1 | 230 / 50 / 1 |
| Motor speed (rpm) | 1370 / 1050 | 1370 / 1050 | 1370 / 1050 | 1370 / 1050 | 1370 / 1050 | 1370 / 1050 |

*Company OLEFINI reserves the right to alter given product specifications without further notice.