

SIMPLE "X" SERIES

(door height up to 3,0 m)

- Energy Saving
- Barrier to Insects, Dust Odours, Pollutants & Humidity
- Slim Line Design
- Easy Installation
- Low Noise Level
- Stainless steel (430) body
- Competitive Price

Infrared Remote Control



motor position:
MIDDLE

1,0m

1,2m

1,4m

1,6m

1,8m

2,0m

MAXIMUM DOOR WIDTH




TECHNICAL DETAILS

TYPE	X10	X12	X14	X16	X18	X20
Max door width (m)	1.0	1.2	1.4	1.6	1.8	2.0
Max door height (m)	3.0	3.0	3.0	3.0	3.0	3.0
Max Outlet velocity (m/sec)	10.0 / 6.0	10.0 / 6.0	10.0 / 6.0	10.0 / 6.0	10.0 / 6.0	10.0 / 6.0
Max Air volume (m ³ /h)	1735 / 1040	2010 / 1200	2400 / 1440	2885 / 1730	3120 / 1870	3400 / 2050
Motor power input (W)	145	145	145	185	495	550
Capacitor (µF)	4	4	4	8	12	12
DIMENSIONS						
L: Total length (mm)	1080	1220	1510	1670	1820	2020
W: Total width (mm)	202	202	202	202	202	202
H: Height (mm)	203	203	203	203	203	203
w: Outlet width (mm)	54	54	54	54	54	54
Power supply (V/Hz/N-)	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Motor speed (rpm)	1370 / 1100	1370 / 1100	1370 / 1100	1370 / 1100	1370 / 1100	1370 / 1100
Ingress Protection	IP20	IP20	IP20	IP20	IP20	IP20

FOR USE IN:

SMALL SHOPS, JEWELRIES, HAIRDRESSER SALONS, HEALTH SPAS, CAFETERIAS PASTRY SHOP, BREWERIES, SMALL HOTELS, BANKS, SUPER MARKETS, FOOD FACTORIES, MEAT FACTORIES, FISH MONGER SHOPS, SMALL COLD STORAGE PLANTS

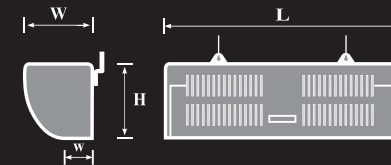

ELECTRICALLY HEATED "X" SERIES


(door height up to 2,3 m)



cross flow fan
Ø 110 diameter

OPERATION WAYS

- ON-OFF / HI-LOW (switches)
- ON-OFF / HI-LOW with infrared remote control (I.R)




stitched wire resistance

TECHNICAL DETAILS

TYPE	XEH 08 L/R	XEH 10 L/R	XEH 12	XEH 16	XEH 20	
Max door width (m)	0.8	1.0	1.2	1.6	2.0	
Max door height (m)	2.3	2.3	3.0	3.0	3.0	
Max Outlet velocity (m/sec)	7.5 / 4.0	7.5 / 5.5	8.0 / 5.0	8.0 / 5.0	8.0 / 5.0	
Max Air volume (m³/h)	960 / 510	1250 / 880	1700 / 1000	2445 / 1440	2800 / 1750	
Motor power input (W)	120	240	145	185	550	
Capacitor (µF)	4	4	4	8	12	
Noise level in 1 m [dB(A)]	60 / 58	60 / 58	60 / 58	60 / 58	60 / 58	
DIMENSIONS	L: Total length (mm)	842	1070	1220	1670	2020
	W: Total width (mm)	202	202	202	202	202
	H: Height (mm)	203	203	203	203	203
	l: Outlet length (mm)	663	893	1180	1630	1980
	w: Outlet width (mm)	54	54	54	54	54
Weight (kgr)	9	12	15.5	19.0	21.0	
Thermal power (kW)	6	6	6 or 9	9 or 12	12	
Max current cons. (A)	9 / per phase	9 / per phase	9 or 13.5 / per phase	13.5 or 18 / per phase	18 / per phase	
T outlet - T inlet (°C)	15 - 35	45 - 65	20	20	20	
Power supply (V/Hz/N-)	400 / 50 / 3	400 / 50 / 3	400 / 50 / 3	400 / 50 / 3	400 / 50 / 3	
Motor speed (rpm)	1350 / 1000	1350 / 1000	1350 / 1000	1350 / 1000	1350 / 1000	
Heating stages	16	16	16	16	16	
Ingress Protection	IP20	IP20	IP20	IP20	IP20	

control panel

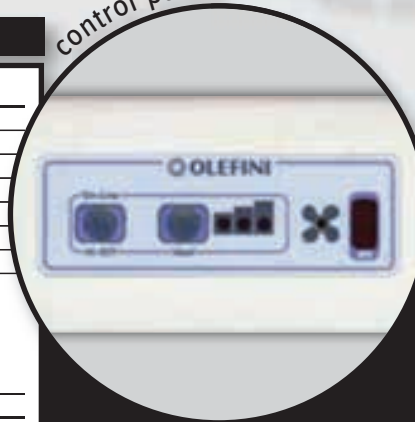

motor position:
LEFT
RIGHT

0,8m

1,0m


motor position:
MIDDLE

1,2m

1,6m

2,0m

MAXIMUM DOOR WIDTH

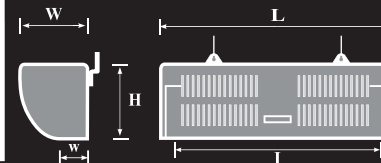

*Company OLEFINI reserves the right to alter given product specifications without further notice.